

USG BORAL FIRESTOP™

Fire Resistant, Industry Leader



USGBoral.com

Plasterboards

Ceilings

Compounds

Metal Framing

Substrates

USG BORAL FIRESTOP™

USG Boral Firestop™ is specially developed and tested for use in fire rated applications. USG Boral Firestop™ is ideal for walls, ceiling, beams, and columns in residential and commercial construction for fire protection. The application of USG Boral Firestop™ in single and multiple layers provides a variety of fire rated and acoustic performance.



ADVANTAGES



Fire Safety

- Firestop™ is able to prevent the spread of fire for 30 minutes and up to 4 hours, depending on system applied.
- Firestop™ is ideal for lining walls, ceiling, beams and columns to ensure effective fire protection.



Aesthetic

Seamless and smooth finish.



Consistent Quality

Produced in a state-of-the-art ISO9001 certified plant.

PRODUCT DATA

| Product Name | USG Boral Firestop™ | | | |
|-----------------------------|-----------------------------|-------|------------------|-------------------|
| Thickness (mm) | 12.5 | 16 | Product Standard | BS EN 520:2004 |
| Weight (kg/m ²) | 11.50 | 13.60 | Product Testing | BS 476 Part 6 & 7 |
| Size* (mm) | 1220 mm X 2440 mm (4' X 8') | | System Testing | BS 476 Part 22 |
| Edge Detail | Tapered | | | |


* The above is standard size, please refer to USG Boral for other board sizes.

APPLICATIONS

Suitable for fire rated partition and ceiling systems, for commercial and residential buildings.

SYSTEMS

USG Boral 1-Hour Fire Rated Ceiling System with USG Boral Firestop™ 16 mm and Rondo KEY-LOCK® System

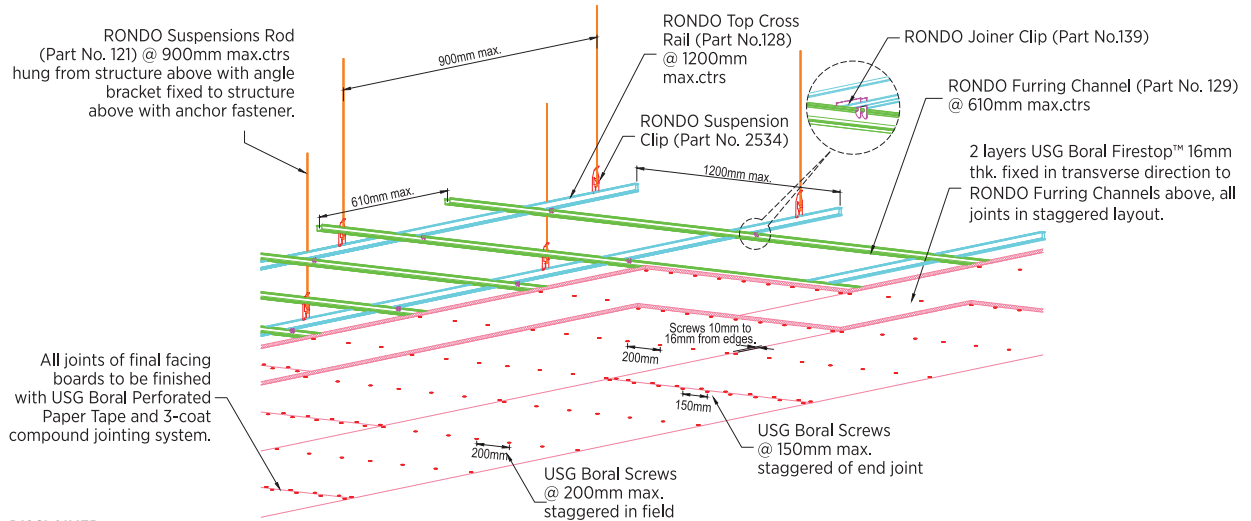

DISCLAIMER:

The indicated spacing of Rondo KEY-LOCK® system above is designed to take ceiling load up to 50kg/m².

USG Boral 1-Hour Fire Rated Drywall System with USG Boral Firestop™ 16 mm

