

USG BORAL STANDARDCORE™

Modern, Versatile, Simple Installation



USG BORAL STANDARDCORE™

USG Boral StandardCORE™ is composed of a gypsum plaster core encased in the recycled paper face and backing with significant properties for durability and stability. USG Boral StandardCORE™ can be fixed to timber, metal framing, and masonry construction.



ADVANTAGES



Aesthetic

Smooth finish with potential for unlimited designs and numerous finishing options to suit customer's imagination.



Fast and Easy Installation

Easy to carry and install. Task can also be completed quickly.



Consistent Quality

Produced in a state-of-the-art ISO9001 certified plant.



Clean Site

Leaves minimal dust residue. Work site remains clean and presentable.

PRODUCT DATA

Product Name	USG Boral StandardCORE™	
Size* (mm)	1220 mm X 2440 mm (4' X 8')	
Thickness (mm)	12.5	16
Weight (kg/m ²)	7.20	11.70
Edge Detail	Tapered	


* The above is standard size, please refer to USG Boral for other board sizes.

APPLICATIONS

Suitable for internal dry area ceiling and wall.

SYSTEMS

USG Boral Concealed Ceiling System with USG Boral StandardCORE™ 12.5 mm and Rondo KEY-LOCK® System

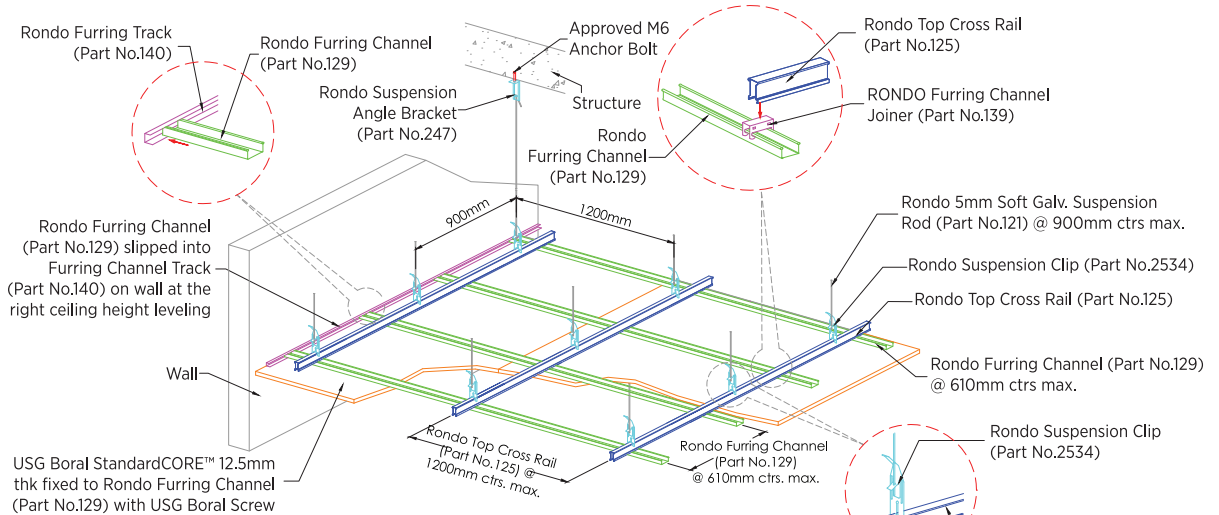

DISCLAIMER:

The indicated spacing of Rondo KEY-LOCK® system above is designed to take up maximum ceiling load of 13kg/m² only.

USG Boral Drywall System with USG Boral StandardCORE™ 16 mm

