

DONN® DXIII

STANDARD SPECIFICATION



Features & Benefits:

- 24mm (15/16") exposed ceiling grid components used in general and designer applications
- Rounded 3mm reveal creates a more luxurious utility grid system
- Available in black or unpainted reveal for versatility
- Advanced steel galvanisation coating system on grids that resist corrosion and rust
- Assembles and locates with an audible "click" for grid module firmness
- Patented proprietary QUICK-RELEASE™ cross tees that remove with a twist-and-roll action, advantageous in low clearance areas
- Complies with loading requirements of the Light Duty Classification under ASTM C635

PRODUCT DATA

	Tee System	Length (mm)	Height (mm)	Item No.	Class	Color
MAIN TEE		3000	32	DXIII 3000 IM	Class A	Flat White/Black
		3048/10'	32	DXIII 3048 IM	Class A	Flat White/Black
CROSS TEE		1200	32	DXIII 1200 IM	Class A	Flat White/Black
		1220/4'	32	DXIII 1220 IM	Class A	Flat White/Black
Cross Tee		600	32	DXIII 600 IMM	Class A	Flat White/Black
		610/2'	32	DXIII 610 IMM	Class A	Flat White/Black
Wall Angle	Molding 	3000	22 x 22	MT 3000	Class A	Flat White

EDGE DETAILS

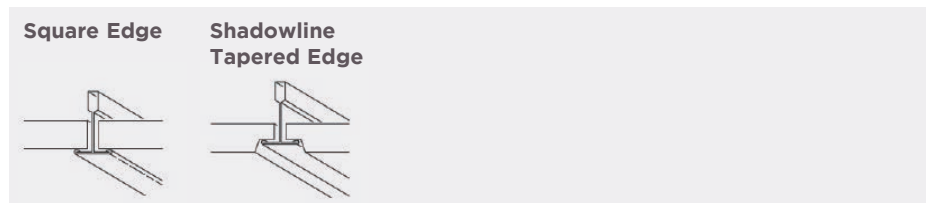

Profile

