

# DONN® DXI

## STANDARD SPECIFICATION



### Features & Benefits:

- 24mm (15/16") exposed ceiling grid components used in general and designer applications
- Workhorse of the industry providing economical advantage and design simplicity
- Accepts gypsum, mineral fibre or metal ceilings for ceiling-area accents without changing grid system
- Patented proprietary QUICK-RELEASE™ cross tees that remove with a twist-and-roll action, advantageous in low clearance areas
- Assembles and locates with a loud “click” for positive reinforcement of a solid installation
- Advanced steel galvanization coating system on grids that resist corrosion and rust
- Complies with loading requirements of the Light Duty Classification under ASTM C635

## PRODUCT DATA

	Tee System	Length (mm)	Height (mm)	Item No.	Class	Color
MAIN TEE		3600	32	DXI 3600IM	Class A	White
		3660/12'	32	DXI 3660IM	Class A	White
		3000	32	DXI 3000IM	Class A	White
		3048/10'	32	DXI 3048IM	Class A	White
CROSS TEE		1200	25	DXI 1200IM	Class A	White
		1220/4'	25	DXI 1220IM	Class A	White
Cross Tee		600	25	DXI 600LMM	Class A	White
		610/2'	25	DXI 610LMM	Class A	White
Wall Angle		3000	22 x 22	MT3000	Class A	White

## EDGE DETAILS

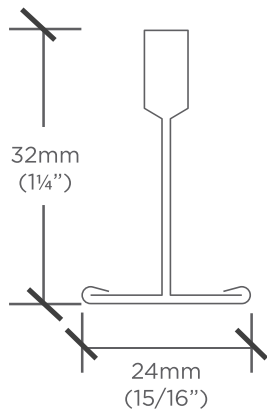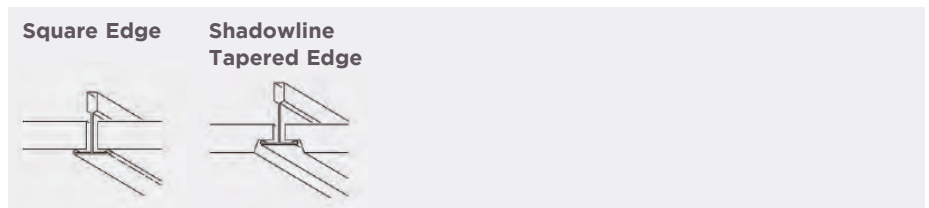

Profile

