

DONN® DXT

STANDARD SPECIFICATION



Features & Benefits:

- A refined 14mm (9/16") narrow face creating a more monolithic ceiling plane
- Fully compatible with square-edge and reveal-edge ceiling tiles that accept gypsum, mineral fiber or metal ceilings
- Advanced steel galvanisation coating system on grids that resist corrosion and rust
- Patented proprietary QUICK-RELEASE™ cross tees that resist grids twisting
- Complies with loading requirements of the Light Duty Classification under ASTM C635
- Manufactured with technologically advanced, one-step manufacturing process that ensures the highest grid quality

PRODUCT DATA

	Tee System	Length (mm)	Height (mm)	Item No.	Class	Color
MAIN TEE		3000	32	DXT NF 3000IM	Class A	Flat White
		3048/10'	32	DXT NF 3048IM	Class A	Flat White
CROSS TEE		1200	32	DXT NF1200IM	Class A	Flat White
		1220/4'	32	DXT NF1220IM	Class A	Flat White
Cross Tee		600	25	DXT NF600 LMM	Class A	Flat White
		610/2'	25	DXT NF610 LMM	Class A	Flat White
Wall Angle	 Molding®	3000	22 x 14	MN 3000	Class A	Flat White
		3000	15 x 10 x 11	MS 3000	Class A	Flat White

EDGE DETAILS

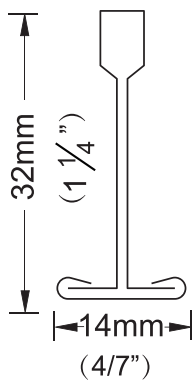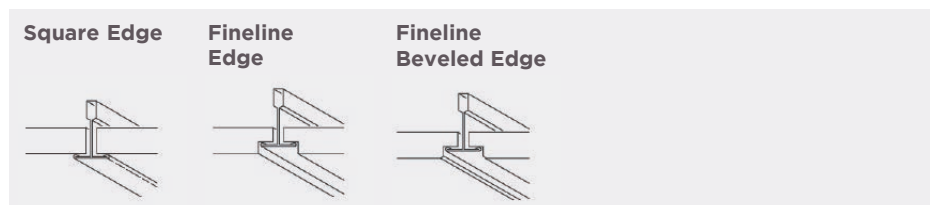

Profile

